

J.R. Holzmacher P.E., LLC

3555 Veterans Memorial Highway Suite A, Ronkonkoma New York 11779
Tel: (631) 234-2220 Fax: (631) 234-2221 e-mail: info@holzmacher.com

NEW SANITARY SEWER COLLECTION SYSTEM EXTENSION- PHASE IA, BLUFF POINT ROAD AREA JRH Project No. NortV 21-01-04

INC. VILLAGE OF NORTHPORT
SUFFOLK COUNTY, NEW YORK

ADDENDUM - 2

To: Bidders list
CC: Inc. Village of Northport
From: J.R. Holzmacher P.E., LLC
Date: January 9, 2023

Bid Date: January 26, 2023

This Addendum No. 2 contains Bidders' questions and official answers.

Question 1: Please confirm whether or not the GPU units require watertight covers and lateral vents as per Section 15440 Part 2.1.C.

Answer: **No GPU units will require watertight covers or lateral vents.**

Question 2: Please clarify whether the Contractor is to include QC testing costs in the various items of the contract or if all QC testing will be paid for out of the General Construction Contingency Allowance Item?

Answer: **Item 29 in the Bid Form page BF-7, "General Construction Contingency Allowance - (PSEG Coordination) and (Testing Services) is intended to be associated with Electrical and Control Work for the pump station installations only. The contractor "is to include QC testing costs in the various items of the contract" except for Item 29 and Item 25, Pressure tests for each residential force main and force main in roadway.**

Question 3: Please confirm that all of the GPU units are to be equipped with an Interlocking Ballast System.

Answer: **The only GPU unit to be equipped with an interlocking ballast system is at Residence #5 Bluff Point Road and shall be included in the costs for Item 9 of the Bid Form on page BF-4 of the bid documents.**

Question 4: What are the licensing requirements for the work on Residential Property?

Answer: **The Village has an "Access agreement" specific to each homeowner to allow contractor access on to each parcel for planned construction work as indicated on the plans and in the specifications. The GPU, control panel/electrical and force main will be owned and maintained by the Village. Not all agreements have been executed at this time.**

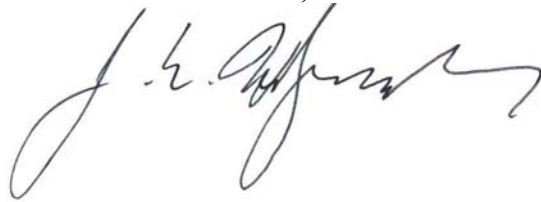
Question 5: Please provide make/model for the new underground electric pull boxes needed at some of the locations.

Answer: **Make; Quazite, Model; PC1212Z80117, would be representative of new underground electrical pull boxes for locations indicated on the plans. The specific site conditions may vary the depth of electrical conduit dependent on necessary clearances to other existing buried utilities. The contractor may make alternate shop drawing submittals to this recommended item.**

END OF ADDENDUM No.2

Very truly yours,

J.R. Holzmacher P.E., LLC

A handwritten signature in black ink, appearing to read 'J. R. Holzmacher', with a stylized flourish at the end.

J. Robert Holzmacher
Principal

JRH:az

CC: Donna Koch, Inc. Village of Northport, Village Mayor
Donald Tesoriero, Inc. Village of Northport, Asst. to the Mayor/NYSCEO